



Sunelex

SUNSCREEN
FABRICS

CLASSIC
COLLECTION

WWW.SUNETEX.COM

Sunetex

SUNSCREEN FABRIC
CLASSIC COLLECTION





2500 & 2600 SERIES

2500 Series :Openness 5%

2600 Series :Openness 9%

Composition:	29% Polyester & 71% PVC	29% Polyester & 71% PVC
Finished Width:	200/250/300cm	200/250/300cm
Thickness:	0.70mm $\pm$ 5%	0.75mm $\pm$ 5%
Standard Packing:	30M	30M
Mesh Weight per m²	415g/m ² $\pm$ 5%	425g/m ² $\pm$ 5%
Mesh/In(inch):	48*42	48*46
Anti-Ultraviolet:	95%	91%
Breaking Strength:	Warp 1600N/5cm Weft 1500N/5cm	Warp 1600N/5cm Weft 1500N/5cm
Color Fastness:	GRADE 4.5, AATCC 16-2003	GRADE 5, AATCC 16-2003
Fire Classification:	NFPA701(USA)	NFPA701(USA) www.sunetex.com

BASIC

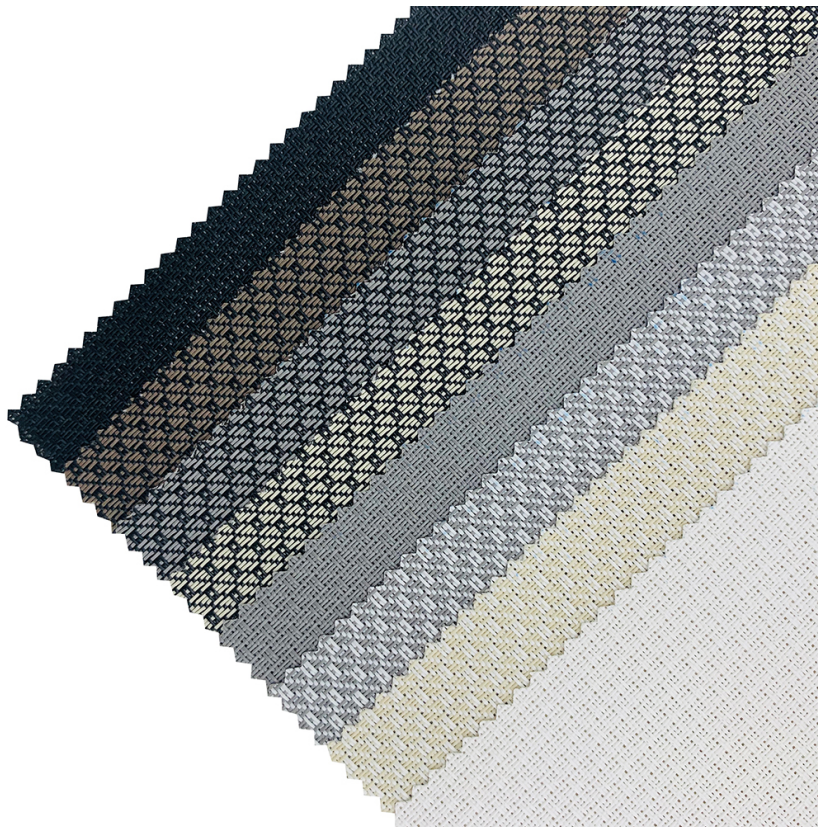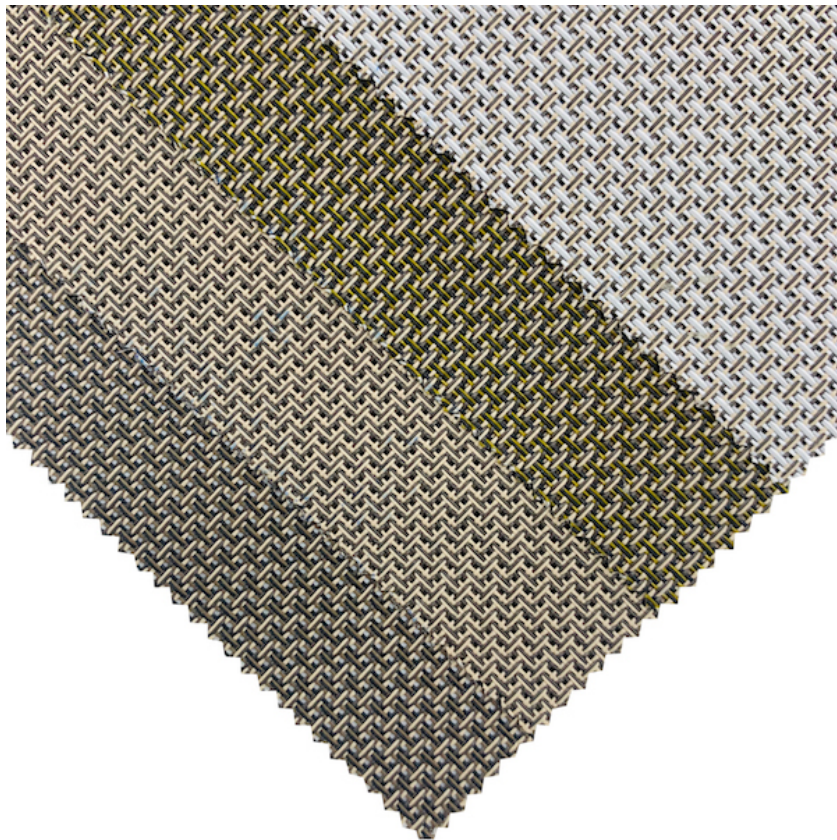



2500 & 2600 SERIES Diamond

Openness:5%

Openness:9%

2501

2502

2503

2504

2505

2506

2507

2508

2601

2602

2603

2604

Applications



Roller Shades



Panel Tracks



Roman Shades



Skylight Shades

WWW.SUNETEX.COM

SUNETEX

2500 & 2600 SERIES

DIAMOND

BY GROUPEVE



SICHUAN GROUPEVE CO.,LTD

NO.1098,MIDDLE SECTION OF JIANNAN AVENUE,
HIGH-TECH ZONE,CHENGDU, SICHUAN, P.R. CHINA

TEL./FAX:0086-28-8533 3329

EMAIL:info@groupeve.com

www.sunetex.com