

**GROUPEVE**  
SUNSHADE TEXTILES



# SUNSCREEN ZEBRA FABRIC

NEW COLLECTION



[www.groupeve.com](http://www.groupeve.com) |

# SuneTex®

## SUNSCREEN ZEBRA FABRIC

NEW COLLECTION



Z2001-Z2005  
BASIC Series

### SPECIFICATION Basic Series

|                          |                                                                                                                                                                                                                                                                                                                                  |
|--------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Composition              | 30% Polyester & 70% PVC                                                                                                                                                                                                                                                                                                          |
| Area Weight              | 360gsm $\pm$ 5%                                                                                                                                                                                                                                                                                                                  |
| Width                    | 2m/2.5m/3m                                                                                                                                                                                                                                                                                                                       |
| Roll Length              | 30m                                                                                                                                                                                                                                                                                                                              |
| Openness Factor          | Around 5%                                                                                                                                                                                                                                                                                                                        |
| Thickness                | 0.75mm $\pm$ 5%                                                                                                                                                                                                                                                                                                                  |
| Anti-Ultraviolet         | About 95%                                                                                                                                                                                                                                                                                                                        |
| Fireproofing Grade       | NFPA701(USA), GB 50222-95 B1 Grade                                                                                                                                                                                                                                                                                               |
| Anti-bacteria Standard   | ASTM G21                                                                                                                                                                                                                                                                                                                         |
| Color Fastness           | Grade 8, ISO 105 B02                                                                                                                                                                                                                                                                                                             |
| Shear & Repeat           | 50mmx75mm                                                                                                                                                                                                                                                                                                                        |
| Ecological Textiles Cer. | Oeko-Tex Standard 100 Class IV                                                                                                                                                                                                                                                                                                   |
| Lead Content             | 16 CFR 1303(American standard)                                                                                                                                                                                                                                                                                                   |
| Air Quality Auth.        | GREENGUARD Authentic                                                                                                                                                                                                                                                                                                             |
| Formaldehyde Content     | GB/T 2912.1                                                                                                                                                                                                                                                                                                                      |
| DMF Content              | 2009 251 EC                                                                                                                                                                                                                                                                                                                      |
| Processing Method        | Welding or weaving                                                                                                                                                                                                                                                                                                               |
| Clean and Maintain       | >Please use dust collector to clean the ash.<br>>Don't scrub in by hand or washing machine.<br>>Please don't use any cleaning agent, which might against the PVC coating.<br>>Don't rub it with rough material either.<br>>Please wash it with soap, and then with clean water, finally hang it up straight to dry it naturally. |


[www.groupeve.com](http://www.groupeve.com)




**CRS**  
CHEMICAL INSPECTION  
& REGULATION SERVICE





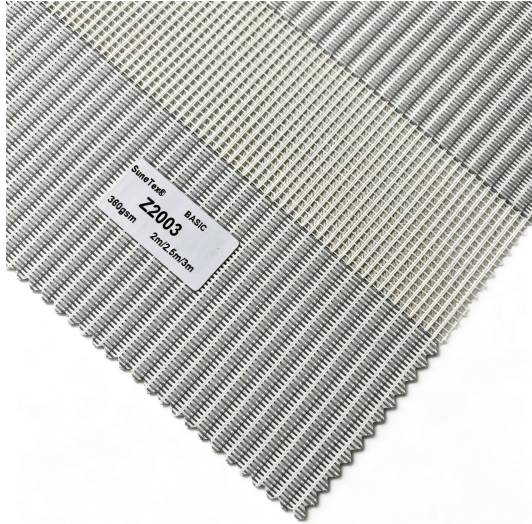



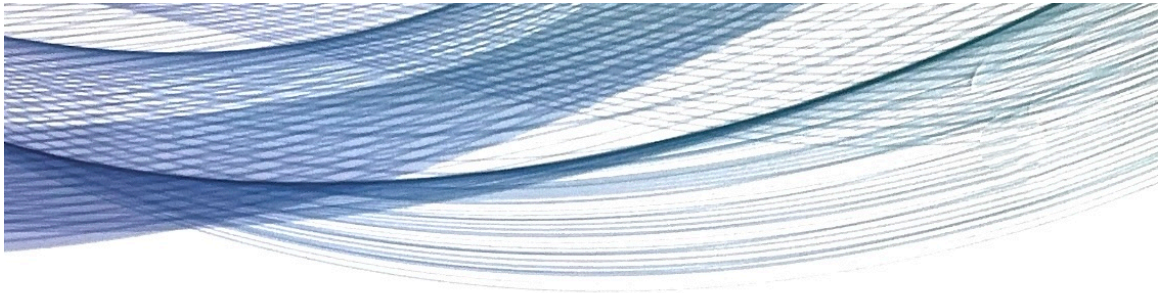

**GROUPEVE**  
SUNSHADE TEXTILES

**SICHUAN GROUPEVE CO.,LTD**

No.1098,Middle Section of Jiannan Avenue,  
High-Tech. Zone,Chengdu,P.R.China  
Tel./Fax.:0086 28 85333329  
Email:info@groupeve.com

[www.groupeve.com](http://www.groupeve.com)

